# **Bistroo**


extremis<sup>®</sup>

© Design by Dirk Wynants for Extremis, 2018



# **Dimensions**

The Bistroo is available in 1 dimension

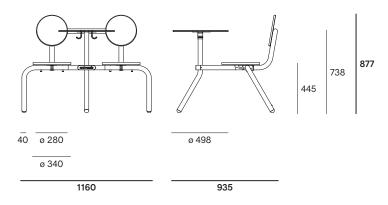

# **Box dimensions**

The Bistroo comes in 1 box

Box 1: Bistroo



Box dimensions (mm)		L	W	Н	Qty	Volume (m3)	Gross weight (kg)	Net weight (kg)	Packaging weight (kg)
Bistroo	Box 1	750	610	280	1	0,13	28,00	23,60	4,40

# Table tray

The table tray is available in 1 dimension



120





211

# Table tray box

The table tray comes in 1 box

Box 3: table tray



Box dimensions (mm)		L	W	н	Qty	Volume (m3)	Gross weight (kg)	Net weight (kg)	Packaging weight (kg)
Table tray	Вох 3	270	215	50	1	0,01	0,42	0,23	0,19

## **Cushions**

The cushion is available in 1 dimension

The optional cushions are delivered inside the box with the Bistroo: 0,31 kg/pc










# Floor fastening

The floor fastening is available in 1 dimension

The optional floor fastening is delivered inside the box with the Bistroo: 0,13 kg/pc



# Tabletop, frame, seats & backrests Sunbrella® cushions Table tray Off white (RAL9002) Grey chiné Dark taupe Sunbrella Natté Verdigris Marble Sunbrella Lopi Reed green (RAL6013) Copper brown (RAL8004) Charcoal **Leaf green** Sunbrella Heritage Cosmic cream (RAL1015) Cobalt blue (RAL5013) Indigo Sunbrella Heritage Sun yellow (RAL1032) Sunbrella Domino Pistache (RAL6021)



Bamboo

Materials	Key facts	Thickness	Layer thickness	Density	In/outdoor	Water	UV color fastness	Flame retarding
		mm	micron					
Structured powder- coated aluminium tabletop, seats & backrests	A technique of applying dry paint to a part Electrostatically charged and sprayed onto the object Placed in an oven and powder particles melt and coalesce to form a continuous film More scratch-resistant than non structured powder-coating	10	50 - 100	2,70 10 <sup>3</sup> kg/m <sup>3</sup>	Outdoor & indoor	n.a.	Very good: color can fade to some extent when expo- sed to UV	NEN-EN 13501-1 A2-s1*
Structured powder- coated stainless steel legs	Easy to clean     Stainless steel (for protection against rust), then powder-coated     Placed in an oven and powder particles melt and coalesce to form a continuous film     More scratch-resistant than non structured powder-coating	2	50-100	8,00 10 <sup>9</sup> kg/m <sup>3</sup>	Outdoor & indoor	n.a.	Very good: color can fade to some extent when expo- sed to UV	NEN- EN13501- 1 A1 *
Bamboo table tray	Oiled for better dirt resistance	20	n.a.	600 à 700 kg/m³	Outdoor & indoor	n.a.	Wood turns grey after a while	/
Sunbrella® cushions	100% Sunbrella Acrylic     Best outdoor fabric available for making cushions     Dirt repellent     Not waterproof, store inside!     Machine washable at max. 30°C. Ironing restores the protective layer	0,50	n.a.	260 g/m2	Outdoor & indoor	The fa- bric has a water column of 350 mm (EN 20811)	7/8 (ISO 105-B02)	/
Stainless steel AISI 316 floor fastening	High rust resistance     Periodical maintenance required	1,50	n.a.	8,00 10 <sup>3</sup> kg/m <sup>3</sup>	Outdoor & indoor version	n.a.	Very good	NEN- EN13501- 1 A1 *

#### NEN-EN13501-1 A1

Class A1 products will not contribute to fire in any stage, including fully developed fire. For this reason, they are assumed to be capable of satisfying all requirements of all lower classes as well.

#### NEN-EN13501-1 A2-sl

Satisfying the same criteria as class B for the SBI-test according to EN 13823. In addition, under conditions of a fully developed fire these products will not significantly contribute to the fire load and fire growth

#### Good to know

- Fits on a terrace or balcony of 1.2 x 1.2 meter.
- Water draining seat.
- Bistroo combines perfectly with Virus.
- Tabletop cut-out to fix accessories.



· Stackable up to 4 pieces.



#### **Maintenance**

#### POWDER COATED PARTS

White powder coating obviously requires more maintenance.

- Shake or brush off loose dirt immediately. Spray Extremis Multi Cleaner.
- Use a soft brush and make circular movements.
- Let the suds soak in for a moment.
- Rinse thoroughly to remove all soap residue.
- Simply allow to dry.
- It's also possible to put the blanket and the pillow covers in a washing machine (max 40°C). Follow the cleaning instruction on the label.

## Floor fastening

Our Bistroo picnic table can be fixed to the floor, to prevent them from being moved, or worse, from being stolen. However, attaching it to the floor is not always enough, as bolts can always be unscrewed. We offer a connection piece that replaces the end cap at the bottom of a table leg.



### F.A.Q.

Q: Is it possible to stack the table?

A: It is possible. You can stack Bistroo up to 4 pieces. To avoid dammage, use

Q: Is it easy to move the table?

A: The table is very light, so it can be moved easily.

# Warnings A

#### General

- Do not use any sharp tools to open the packaging. We strongly advise against using power tools.
- Tripping hazard, mind your step
- Do not put out cigarettes on the table.
- Not grafitti proof.
- Do not leave children unattended whilst playing on the table.
- To avoid danger of suffocation, keep plastic bags away from babies and children.
- Colors can differ over years and from batch to batch.

Anchoring the product has to be done by qualified people.

- · For anchoring: use suitable bolts or screws from a specialized store depending on the material your terrace is made of.
- Stackable up to 4 pieces.
- Always stack the tables with 2 people.
- Only use Extremis accessories.
- Do not sit on the tabletop.
- Do not stand or jump on the seat or the tabletop.
- Max. 1 person or 120 kg per seat.

#### Powder coating

- White powder coating requires more maintenance.
- Do not use abrasive scouring powders or scourers as they will scratch the surface.
- Color can fade to some extent when exposed to UV.
- Flame retarding NEN-EN13501-1 A2-sl -

Satisfying the same criteria as Class B for the SBI-test according to EN13823. In addition, under conditions of a fully developed fire these products will nog significantly contribute to the fire load and fire growth.

Dark colors can get very hot in sunny weather.

### <u>Sunbrella</u>

- Not waterproof, store inside!
- Shake or brush off loose dirt immediately.
- UV color fasteness: 7/8 (ISO 105-B02).

The content of this document, in particular the mentioned models, is protected by copyrights and/or design rights. The present document and its content is communicated to you for information purposes only. Any partial or total reproduction or any other use without our prior written permission is strictly prohibited. This technical sheet remains subject to possible changes. All dimensions are in mm, unless mentioned otherwise. Extremis is not responsible for the errors in the documentation of products. All measurements are approximate and are provided for informational purposes only