# **Pantagruel tables**

# extremis<sup>®</sup>


© Design by Dirk Wynants for Extremis, 2014





# Dimensions

The Pantagruel table is available in two heights

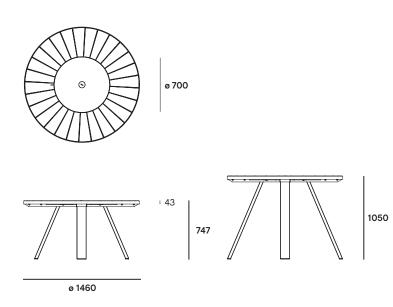

# **Box dimensions**

The Pantagruel tables come in 2 boxes

Box 1: Tabletop



Box 2: Table egs + mounting kit




Box 3: High table legs + mounting kit



Box dimensions (mm)		L	W	н	Qty	Volume (m3)	Gross weight (kg)	Net weight (kg)	Packaging weight (kg)
Pantagruel table	Box 1	1530	1500	100	1	0,23	69,00	63,20	5,80
	Box 2	1000	340	290	1	0,10	25,10	22,40	2,70
					Total:	0,33	94,10	85,60	8,50
Pantagruel high table	Box 1	1530	1500	100	1	0,23	69,00	63,20	5,80
	Box 3	1510	330	270	1	0,13	30,40	26,80	3,60
					Total:	0,36	99,40	90,00	9,40

### Floor fastening

The floor fastening is available in one dimension



### **Box dimensions**

The floor fastening comes in 1 box


Box 4: floor fastening set



80									
Box dimensions (mm)		L	w	н	Qty	Volume (m3)	Gross weight (kg)	Net weight (kg)	Packaging weight (kg)
Floor fastening	Box 7	205	145	150	1	0,01	1,03	0,96	0,07

# **Protection felt**

The protection felt is available in one dimension



### Box dimensions

The protection felt comes in 1 box

Box 5: protection felt set



Box dimensions (inch)		L	W	н	Qty	Volume (m3)	Gross weight (kg)	Net weight (kg)	Packaging weight (kg)
Protection felt	Box 8	205	145	150	1	0,01	0,08	0,01	0,07

### Materials & colors

Tabletop	Frame & legs		HPL Lazy Susa	an
Iroko hardwood		Black (RAL9005) Structured powder coating		Black
Hellwood		Earth Structured powder coating		Earth
		Beach beige (RAL1019) Structured powder coating		Beach beige
		Off white (RAL9002) Structured powder coating		Off white



Materials	Key facts	Thickness	Layer thickness	Density	In/outdoor	Water	UV color fastness	Flame retarding
		mm	micron					
Iroko tabletop	<ul> <li>Durability CLASS 1</li> <li>Feels comfortable in all weather conditions</li> <li>Advisable to oil the wood</li> </ul>	20	n.a.	600 à 700 kg/m³	Outdoor & indoor	n.a.	Untreated wood turns grey after a while	/
Hellwood tabletop	<ul> <li>Durability CLASS 1</li> <li>Carries the PEFC<sup>™</sup> label for durable forestry</li> <li>Feels comfortable in all weather conditions</li> <li>Advisable to oil the wood</li> </ul>	20	n.a.	600 kg/m <sup>3</sup>	Outdoor & indoor	n.a.	Untreated wood turns grey after a while	/
Structured powder coated zinced steel frame	<ul> <li>Easy to clean</li> <li>Electro galvanized (for protection against rust), then powder coated</li> <li>More scratch-resistant than non structured powder coating</li> </ul>	4 - 6	+/- 100	7,50 10 <sup>3</sup> kg/m <sup>3</sup>	Outdoor & indoor	n.a.	Very good: color can fade to some extent when expo- sed to UV	NEN- -EN13501- 1 A1 *
Structured powder coated stainless steel legs	<ul> <li>Easy to clean</li> <li>Stainless steel (for protection against rust), then powder coated</li> <li>More scratch-resistant than non structured powder coating</li> </ul>	2	50 - 100	8,00 10 <sup>3</sup> kg/m <sup>3</sup>	Outdoor & indoor	n.a.	Very good: color can fade to some extent when expo- sed to UV	NEN- -EN13501- 1 A1 *
High pressure laminate Lazy Susan	<ul> <li>Manufactured under high pressure</li> <li>Reinforced with wood fibres</li> <li>Flat panel</li> <li>High impact resistance</li> <li>Easy to clean</li> </ul>	13	n.a.	1,40 10 <sup>3</sup> kg/m <sup>3</sup>	Outdoor & indoor	n.a.	>6 (EN438-2:27) en (ASTM G53-91)	/

NEN-EN13501-1 A1 Class A1 products will not contribute to fire in any stage, including fully developed fire. For this reason, they are assumed to be capable of satisfying all requirements of all lower classes as well.

### Good to know

- PEFC<sup>™</sup> certified wood (Hellwood) originates from sustainably managed forests.
- The hole in the tabletop to place a shade in is ø65 mm.
- The Pantagruel tables are fitted with a Lazy Susan, a central rotating tray, to easily pass things through.





# F.A.Q.

- Q: Do you need to oil the wood?
- A: Just like other types of wood, wood will gradually become rougher and start to turn grey as a consequence of exposure to the sun and rain. Small cracks and crevices can also appear as part of this process. We strongly advise everyone to treat the furniture with our Wood Protector. This 100% natural oil controls the moisture level within the wood, which makes the planks stay stable for longer, and the layer of oil also helps to prevent spilled liquids from being absorbed, so that stains tend to stay superficial. It is best to repeat this treatment at regular intervals.

# Maintenance

Find maintenance instructions at the product care section of extremis.com for

#### POWDER COATED PARTS

White powder coating obviously requires more maintenance.

#### WOOD

- Clean regularly with mild detergent.
- Thorough cleaning with Extremis Wood Cleaner.
- Oil the wood with Extremis Wood Protector. We recommend oiling the wood at regular intervals depending from location and general weather conditions.
- In order to smoothen the surface again after a thorough cleaning, lightly sand your wood with 120 grit sanding paper or a sanding pad.

#### RECOMMENDED USE

For Extremis Wood protector:



### Floor fastening

Pantagruel comes with an optional floor anchoring set: four steel plates to be fixed with bolts



# Warnings \Lambda

#### <u>General</u>

- Do not use any sharp tools to open the packaging.
- We strongly advise against using power tools.
- Tripping hazard, mind your step Do not put out cigarettes on the table.
- Not grafitti proof. Do not leave children unattended whilst playing on
- the table. To avoid danger of suffocation, keep plastic bags
- away from babies and children. Colors can differ over years and from batch to
- batch.

#### Product

- Do not stand or jump on the table.
- Do not drag the table, but carry it with minimum 2 people
- Anchoring the product has to be done by qualified people.
- For anchoring: use suitable bolts or screws from a specialized store depending on the material your terrace is made of.

- · There is protection felt for delicate floors or indoor use.
- Do not stand on the Lazy Susan.
- The white Lazy Susan relfects in the sunlight.
- Mind your fingers whilst assembling the Lazy Susan

#### Wood

- When delivered, the wood is untreated.
- Wood is a natural material and its look is different for every slat, plank and tree.
- Wood will gradually become rougher and start to turn grey as a consequence of exposure to the sun and rain. We recommend oiling the wood at regular intervals depending from location and general weather conditions
- Clean regularly with mild detergent. Never use a high pressure cleaner as this will roughen the wood's smooth surface and irreparably damage the wood's fiber
- Thorough cleaning with Extremis Wood Cleaner. .
- We strongly recommend that you treat your wood

with wood protector to protect it from stains - small cracks and crevices can also appear as part of this process. We strongly advise everyone to treat the furniture with our Wood Protector.

#### Powder coating

- White powder coating requires more maintenance. Do not use abrasive scouring powders or scourers
- as they will scratch the surface. Color can fade to some extent when exposed to UV. Flame retarding - NEN-EN13501-1 A2-sl
- Satisfying the same criteria as Class B for the SBI-test according to EN13823. In addition, under conditions of a fully developed fire these products will nog significantly contribute to the fire load and fire growth.
- Dark colors can get very hot in sunny weather.

#### HPL

UV color fastness: >6 (EN438-2:27) en (ASTM G53-91)

The content of this document, in particular the mentioned models, is protected by copyrights and/or design rights. The present document and its content is communicated to you for information purposes only. Any partial or total reproduction or any other use without our prior written permission is strictly prohibited. This technical sheet remains subject to possible changes. All dimensions are in mm, unless mentioned otherwise. Extremis is not responsible for the errors in the documentation of products. All measurements are approximate and are provided for informational purposes only

Tech sheet 20241121